



Kohler Engines is now Rehko

Diesel Engines

2.5 – 112 kW | 8.5 – 150 hp



Kohler Engines is now Rehlko



rehlko

Table of contents

KDI Series

10–11 KDI 3404TCR > 56kW
12–13 KDI 3404TCR > 56kW
14–15 KDI 3404TCR < 56kW
16–17 KDI 2504TCR
18–19 KDI 2504M
20–21 KDI 1903TCR
22–23 KDI 1903M

KSD Series [NEW](#)

24–25 KSD 1403

KDW Series (Liquid-Cooled)

26–27 KDW 1404
28–29 KDW 1003
30–31 KDW 702

KD Series (Air-Cooled)

32–33 KD 625–2
34–35 KD 425–2
36–37 KD15 440
38–39 KD15 441
40–41 KD15 350
42–43 KD15 225

Power Ratings

According to ISO 14396

< 19 kW

19 – 36 kW

37 – 55 kW

56 – 75 kW

76 – 100 kW

101 – 130 kW

KDI 3404 LIQUID-COOLED

- 4 CYLINDERS
- ELECTRONIC INJECTION
- STAGE V
- HVO COMPLIANT



55.4 TO 112 kW

KDI 2504 LIQUID-COOLED

- 4 CYLINDERS
- ELECTRONIC INJECTION
- STAGE V
- HVO COMPLIANT



36.4 TO 55.4 kW

INCREASE MACHINE PRODUCTIVITY
APPLICATION FLEXIBILITY
COMPACTNESS
FUEL SAVING
LONG SERVICE INTERVALS
RELIABILITY AND SAFETY
BEST COMFORT
FUN TO DRIVE

KDI 1903 LIQUID-COOLED

- 3 CYLINDERS
- ELECTRONIC INJECTION
- STAGE V
- HVO COMPLIANT



31 TO 50 kW

Power Ratings

< 19 kW

19 – 36 kW

37 – 55 kW

56 – 75 kW

76 – 100 kW

101 – 130 kW

KSD 1403 LIQUID-COOLED

- 3 CYLINDERS
- STAGE V, CHINA 4 AND T4F
- BEST IN CLASS < 19 KW
- HVO COMPLIANT



18.9 kW

KDW LIQUID-COOLED

- 2, 3, 4 CYLINDERS
- STAGE V, TIER 4 FINAL
- HVO COMPLIANT

11.5 TO 24.5 kW



KD AIR-COOLED

- MONO AND TWIN CYL.
- MONO CYL. STAGE V
- HVO COMPLIANT

2.5 TO 18.8 kW*



HIGH POWER DENSITY
LOW FUEL CONSUMPTION
LOW OIL CONSUMPTION
A COMPLETE RANGE OF ACCESSORIES
HIGH AXIAL LOAD (2000 N)
LOW WEIGHT

According to ISO 14396


* According to ISO 3046

Emissions Regulations

The next Stage of EU emission standard comes into force in 2019 (< 56 kW and ≥ 130 kW) and 2020 (56–130 kW) for non-road machinery equipped with diesel engines. The standard continues the path towards reduction of NOx and particulate emissions, and affects machines for construction, agricultural, materials handling, garden machinery and generator sets. Stage V introduces a limit on the number of particulates (PN), thus requiring the adoption of diesel particulate filter (DPF) for engines in this range and the development of a regeneration strategy.

GLOBAL EMISSIONS REGULATIONS

- EU countries enter the Stage V in 2019 (19 kW–56 kW and in 2020 (>56 kW) with the aim of reducing particulate numbers and mass.
- The US is currently regulated by EPA Tier 4 Final
- Countries such as Switzerland or Japan refer to specific norms that move to the same levels of specifications.
- Countries, such as Brazil, Russia and Chile, require less stringent levels.
- Other countries could be considered as non-regulated ones.

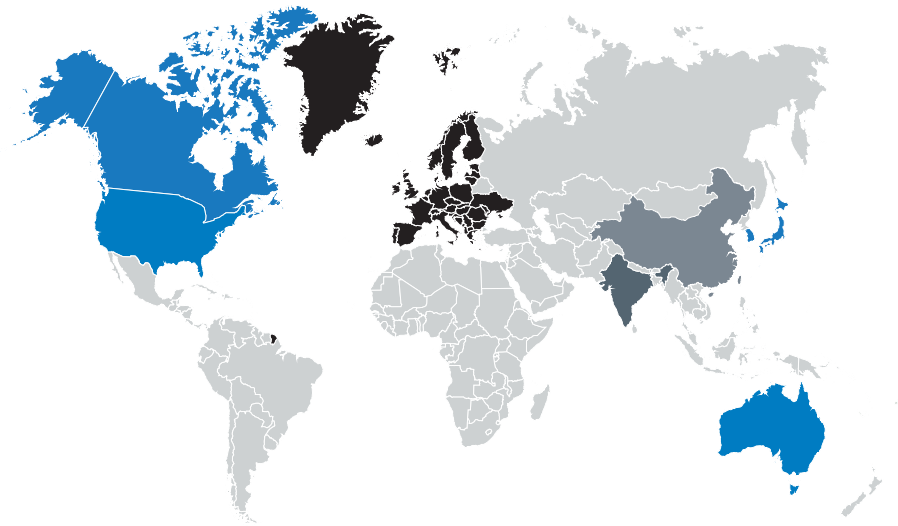

■
EU
EMISSIONS

■
US
EMISSIONS

■
INDIA
EMISSIONS

■
CHINA
EMISSIONS

■
LESS REGULATED
COUNTRIES

KDI Flex

Rehiko's integrated suite of engine systems

KDI Flex is the range of solutions for emission control that Rehiko has designed to enable each configuration of the KDI platform to comply with all emissions standards and regulations, worldwide. At the heart of KDI Flex there is the clean combustion of KDI engines that enables the adoption of a compact, state-of-the-art DPF to meet the Stage V emission standard.

KDI Flex combines the clean in-cylinder combustion of KDI engines, made possible by state-of-the-art high-pressure common rail (2000 bar), 4 valves head, turbocharger and cooled-EGR, and the most compact aftertreatment devices (DOC, DPF and SCR) to comply with all emission requirements.

Each combination of KDI Flex has been designed in line with the all-in-one philosophy, with the objective of minimizing change for engine installation into existing packages. These efficient and reliable systems can be deployed in many combinations to achieve effective emissions solutions for the different markets.

		KDI FLEX SOLUTIONS								
		EA	EB	E4	E5	U3	U4	C4	U4	NE
		EUROPE				NORTH AMERICA & CANADA		CHINA	KOREA	LESS REGULATED COUNTRIES
EMISSION STANDARD		STAGE IIIA EQ.	STAGE IIIB	STAGE IV	STAGE V	TIER 3	TIER 4 FINAL/ CARB	CHINA 4#	STAGE V	LESS REGULATED COUNTRIES
<56kW	MECHANICAL INJECTION	•			•	•	•			•
	HIGH-PRESSURE COMMON RAIL		•		•		•	•	•	(•**)
	C-EGR		•		•		•	•	•	
	DOC		•		•		•	•	•	
	DPF				•		(•*)	•	•	
>56kW	MECHANICAL INJECTION	•				•				•
	HIGH-PRESSURE COMMON RAIL		•	•	•	•	•	•	•	(•**)
	C-EGR		•	•		(•**)	•		•	
	DOC		•	•	•	•	•	•	•	
	DPF				•		•	•	•	
	SCR			•	•		•	•	•	

* HOMOLOGATION PROCESS FOR US – TIER 4 FINAL ONGOING
 ** WITH LIMITATION ON MAX SULFUR CONTENT IN FUEL
 # CHINA 4 READY

Engines Compliance

ENGINES		EUROPE				NORTH AMERICA & CANADA		CHINA	LESS REGULATED COUNTRIES
		STAGE IIIA	STAGE IIIB	STAGE IV	STAGE V	TIER 3	TIER 4 FINAL	CHINA 4*	
KDI RANGE	KDI 3404TCR-SCR			•	•		•	•	•
	KDI 3404TCR		•		•		•	•	•
	KDI 2504TCR	•	•		•		•	•	•
	KDI 2504M	•							•
	KDI 1903TCR		•		•		•	•	•
	KDI 1903M	•							•
KSD RANGE	KSD 1403TCA				•		•	•	•
	KSD 1403TC				•		•	•	•
	KSD 1403NA				•		•	•	•

* CHINA 4 READY

Engines Compliance

ENGINES		EUROPE				NORTH AMERICA & CANADA		CHINA	LESS REGULATED COUNTRIES
		STAGE IIIA	STAGE IIIB	STAGE IV	STAGE V	TIER 3	TIER 4 FINAL	CHINA 4*	
KDW RANGE	KDW1404	•			•		•		•
	KDW1003				•		•		•
	KDW702				•		•		•
AIR-COOLED	KD625-2								•
	KD425-2								•
	KD15-440				•		•		•
	KD15-441								•
	KD15-350				•		•		•
	KD15-225								•

* CHINA 4 READY

KDI 3404TCR

P > 56 kW

KDI-TCV 3404U4/22



INCREASE MACHINE
PRODUCTIVITY
LOW-END TORQUE
HIGH TORQUE DENSITY
STRONG PERFORMANCE



BEST COMFORT
APPLICATION FLEXIBILITY
LONG SERVICE INTERVALS
COMPACTNESS



FUEL SAVING

Standard Equipment

INTAKE MANIFOLD
EXHAUST MANIFOLD
HORIZONTAL EXHAUST
FLANGE
LATERAL OIL FILL PROVISION
3.2 kW ELECTRIC STARTER
90A ALTERNATOR
SAE 3 (11" 1/2)
CABIN HEATING PROVISION

ENGINE MOUNTED OIL
FILTER
FUEL FILTER WITH WATER
SENSOR
ENVIRONMENTALLY
FRIENDLY OIL FILTER

Main Applications

FRUITYARD/VINEYARD
TRACTOR
FRUIT PICKING/HARVESTING
4WD TRACTOR
WATER PUMP (IRRIGATION)
WOOD CHIPPER
CONCRETE MIXER
CONCRETE SPRAYER
EXCAVATOR

COMPACTION ROLLER
LINE STRIPER
COMPACT SHOVEL LOADER
TELESCOPIC HANDLER
SKID STEER LOADER
BACK HOE LOADER
WHEELED LOADER
SELF-PRIMING WATER PUMP
AIR COMPRESSOR

GENERATOR SET
WELDER
MOTOR SWEEPER
AERIAL PLATFORM
STRINGING EQUIPMENT
HIGH PRESSURE WASHER
FORKLIFT

KDI 3404TCR

P > 56kW

COMBUSTION SYSTEM:	DIRECT INJECTION
COOLING SYSTEM:	LIQUID
INTAKE SYSTEM:	TURBOCHARGED
WARRANTY:	3 YEARS



MODEL		KDI-TCV 3404U4/22	KDI-TCP 3404E5/22
MAX. POWER	kW (hp) @ rpm	100 (134) @ 2200	105 (141) @ 2200 112 (150) @ 1800
MAXIMUM TORQUE	Nm (lb-ft) @ rpm	500 (369) @ 1400	650 (479) @ 1400
EMISSION COMPLIANCE		EU STAGE IV US TIER 4 FINAL	EU STAGE V US TIER 4 FINAL
KDI FLEX		U4 (EGR+DOC+SCR)	E5 (DOC+DPF+SCR)
AFTERCOOLER		•	•
NUMBER OF CYLINDERS		4	
BORE AND STROKE	mm (in)	96 X 116 (3.8 X 4.6)	
DISPLACEMENT	cm ³ (in ³)	3359 (205)	
OIL SUMP CAPACITY	L (U.S. qt)	15.6 (16.5)	
DIMENSIONS L x W x H	mm (in)	726 X 576 X 816 (28.6 X 22.7 X 32.1)	
DRY WEIGHT	kg (lbs)	394 (868.6)	

KDI 3404TCR

P > 56 kW

KDI-TCV 3404U4/22B
KDI-TCP 3404E5/22C
KDI-TCV 3404U4/22C
KDI-TCP 3404E5/22E



INCREASE MACHINE
PRODUCTIVITY
LOW-END TORQUE
HIGH TORQUE DENSITY
STRONG PERFORMANCE



BEST COMFORT
APPLICATION FLEXIBILITY
LONG SERVICE INTERVALS
COMPACTNESS



FUEL SAVING

Standard Equipment

INTAKE MANIFOLD
EXHAUST MANIFOLD
HORIZONTAL EXHAUST
FLANGE
LATERAL OIL FILL PROVISION
3.2 kW ELECTRIC STARTER
90A ALTERNATOR
SAE 3 (11" 1/2)
CABIN HEATING PROVISION

ENGINE MOUNTED OIL
FILTER
FUEL FILTER WITH WATER
SENSOR
ENVIRONMENTALLY
FRIENDLY OIL FILTER

Main Applications

FRUITYARD/VINEYARD
TRACTOR
FRUIT PICKING/HARVESTING
4WD TRACTOR
WATER PUMP (IRRIGATION)
WOOD CHIPPER
CONCRETE MIXER
CONCRETE SPRAYER
EXCAVATOR


COMPACTION ROLLER
LINE STRIPER
COMPACT SHOVEL LOADER
TELESCOPIC HANDLER
SKID STEER LOADER
BACK HOE LOADER
WHEELED LOADER
SELF-PRIMING WATER PUMP
AIR COMPRESSOR

GENERATOR SET
WELDER
MOTOR SWEEPER
AERIAL PLATFORM
STRINGING EQUIPMENT
HIGH PRESSURE WASHER
FORKLIFT

KDI 3404TCR

P > 56kW

COMBUSTION SYSTEM:	DIRECT INJECTION
COOLING SYSTEM:	LIQUID
INTAKE SYSTEM:	TURBOCHARGED
WARRANTY:	3 YEARS

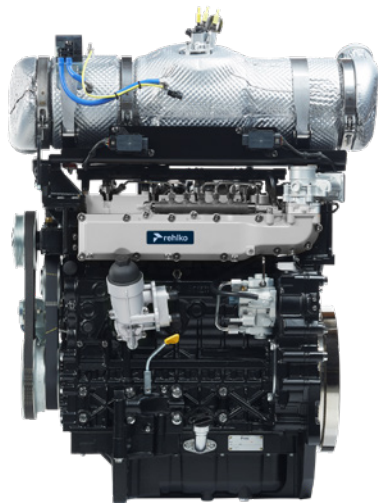

MODEL		KDI-TCV 3404U4/22B	KDI-TCV 3404E5/22C	KDI-TCV 3404U4/22C	KDI-TCV 3404E5/22E
MAX. POWER	kW (hp) @ rpm	75 (101)* @ 2200	75 (101)* @ 2200	90 (120) @ 2200	90 (120) @ 2200
MAXIMUM TORQUE	Nm (lb-ft) @ rpm	475 (350) @ 1400	475 (350) @ 1400	480 (354) @ 1400	480 (354) @ 1400
EMISSION COMPLIANCE		EU STAGE IV US TIER 4 FINAL	EU STAGE V US TIER 4 FINAL	EU STAGE IV US TIER 4 FINAL	EU STAGE V US TIER 4 FINAL
KDI FLEX		U4 (EGR+DOC+SCR)	E5 (DOC+DPF+SCR)	U4 (EGR+DOC+SCR)	E5 (DOC+DPF+SCR)
AFTERCOOLER		•	•	•	•
NUMBER OF CYLINDERS		4			
BORE AND STROKE	mm (in)	96 X 116 (3.8 X 4.6)			
DISPLACEMENT	cm ³ (in ³)	3359 (205)			
OIL SUMP CAPACITY	L (U.S. qt)	15.6 (16.5)			
DIMENSIONS L x W x H	mm (in)	726 X 576 X 816 (28.6 X 22.7 X 32.1)			
DRY WEIGHT	kg (lbs)	394 (868.6)			

* available also at 81 kW / 108 hp and 480 Nm @ 1400 rpm

KDI 3404TCR

P < 56 kW

KDI-TCL 3404U4/22
KDI-TCN 3404E5/22



INCREASE MACHINE
PRODUCTIVITY
LOW-END TORQUE
HIGH TORQUE DENSITY
STRONG PERFORMANCE



BEST COMFORT
APPLICATION FLEXIBILITY
LONG SERVICE INTERVALS
COMPACTNESS



FUEL SAVING

Standard Equipment

INTAKE MANIFOLD
EXHAUST MANIFOLD
HORIZONTAL EXHAUST
FLANGE
LATERAL OIL FILL PROVISION
3.2 KW ELECTRIC STARTER
90A ALTERNATOR
SAE 3 (11" 1/2)

CABIN HEATING PROVISION
ENGINE MOUNTED OIL FILTER
FUEL FILTER WITH WATER
SENSOR
ENVIRONMENTALLY FRIENDLY
OIL FILTER

Main Applications

FRUITYARD/VINEYARD
TRACTOR
FRUIT PICKING/HARVESTING
4WD TRACTOR
WATER PUMP (IRRIGATION)
WOOD CHIPPER
CONCRETE MIXER
CONCRETE SPRAYER
EXCAVATOR

COMPACTION ROLLER
LINE STRIPER
COMPACT SHOVEL LOADER
TELESCOPIC HANDLER
SKID STEER LOADER
BACK HOE LOADER
WHEELED LOADER
SELF-PRIMING WATER PUMP
AIR COMPRESSOR

GENERATOR SET
WELDER
MOTOR SWEEPER
AERIAL PLATFORM
STRINGING EQUIPMENT
HIGH PRESSURE WASHER
FORKLIFT

KDI 3404TCR

P < 56kW

COMBUSTION SYSTEM:	DIRECT INJECTION
COOLING SYSTEM:	LIQUID
INTAKE SYSTEM:	TURBOCHARGED
WARRANTY:	3 YEARS



MODEL		KDI-TCL 3404U4/22	KDI-TCN 3404E5/22
MAX. POWER	kW (hp) @ rpm	55.4 (74) @ 2200	55.4 (74) @ 2200
MAXIMUM TORQUE	Nm (lb-ft) @ rpm	375 (277) @ 1400	465 (343) @ 1100
EMISSION COMPLIANCE		EU STAGE IIIB US TIER 4 FINAL	EU STAGE V
KDI FLEX		U4 (EGR+DOC)	E5 (EGR+DOC+DPF)
AFTERCOOLER		•	•
NUMBER OF CYLINDERS		4	
BORE AND STROKE	mm (in)	96 x 116 (3.8 x 4.6)	
DISPLACEMENT	cm ³ (in ³)	3359 (205)	
OIL SUMP CAPACITY	L (U.S. qt)	15.6 (16.5)	
DIMENSIONS L x W x H	mm (in)	726 x 576 x 816 (28.6 x 22.7 x 32.1)	
DRY WEIGHT	kg (lbs)	394 (868.6)	

KDI 2504TCR

KDI-TCK 2504U3/26
KDI-TCF 2504U4/26
KDI-TCR 2504E5/26



INCREASE MACHINE
PRODUCTIVITY
STRONG PERFORMANCE



BEST COMFORT
APPLICATION FLEXIBILITY
LONG SERVICE INTERVALS
COMPACTNESS



FUEL SAVING

Standard Equipment

INTAKE MANIFOLD
EXHAUST MANIFOLD
SIDE OIL REFILLING
ELECTRIC STARTER
55A ALTERNATOR

SAE 4 (7" 1/2)
CABIN HEATING PROVISION
ENGINE MOUNTED OIL
FILTER
FUEL FILTER

Main Applications

FRUITYARD/VINYARD
TRACTOR
FRUIT PICKING/HARVESTING
4WD TRACTOR
WATER PUMP (IRRIGATION)
WOOD CHIPPER
CONCRETE MIXER
CONCRETE SPRAYER
EXCAVATOR

COMPACTION ROLLER
LINE STRIPER
COMPACT SHOVEL LOADER
TELESCOPIC HANDLER
SKID STEER LOADER
BACK HOE LOADER
WHEELED LOADER
SELF-PRIMING WATER PUMP
AIR COMPRESSOR

GENERATOR SET
WELDER
MOTOR SWEEPER
AERIAL PLATFORM
STRINGING EQUIPMENT
HIGH PRESSURE WASHER
FORKLIFT

KDI 2504TCR

COMBUSTION SYSTEM:	DIRECT INJECTION
COOLING SYSTEM:	LIQUID
INTAKE SYSTEM:	TURBOCHARGED
WARRANTY:	3 YEARS



MODEL		KDI-TCK 2504U3/26	KDI-TCF 2504U4/26	KDI-TCR 2504E5/26
MAX. POWER	kW (hp) @ rpm	55.4 (74) @ 2600	55.4 (74) @ 2600	55.4 (74) @ 2600
MAXIMUM TORQUE	Nm (lb-ft) @ rpm	300 (221) @ 1500	300 (221) @ 1500	315 (232) @ 1500
EMISSION COMPLIANCE		EU STAGE IIIA US TIER 3 EQUIVALENT	EU STAGE IIIB US TIER 4 FINAL	EU STAGE V, US TIER 4 FINAL**, CHINA IV, BHARAT TREM V/CEV V
KDI FLEX		U3	U4 (EGR+DOC)	E5 (EGR+DOC+DPF)
AFTERCOOLER		•	•	•
NUMBER OF CYLINDERS			4	
BORE AND STROKE	mm (in)		88 X 102 (3.5 X 4)	
DISPLACEMENT	cm ³ (in ³)		2482 (151.5)	
OIL SUMP CAPACITY	L (U.S. qt)		11.3 * (11.9)	
DIMENSIONS L x W x H	mm (in)		704 X 523 X 720 (27.7 X 20.6 X 28.3)	
DRY WEIGHT	kg (lbs)		267 (588.6)	

* without dynamic balancers

** homologation process for US - Tier 4 Final ongoing

KDI 2504M

KDI-M 2504EA/26



INCREASE MACHINE
PRODUCTIVITY
STRONG PERFORMANCE



BEST COMFORT
APPLICATION FLEXIBILITY
LONG SERVICE INTERVALS
COMPACTNESS



FUEL SAVING

Standard Equipment

INTAKE MANIFOLD
EXHAUST MANIFOLD
SIDE OIL REFILLING
ELECTRIC STARTER
55A ALTERNATOR

SAE 4 (7" 1/2)
CABIN HEATING PROVISION
ENGINE MOUNTED OIL
FILTER
FUEL FILTER

Main Applications

FRUITYARD/VINYARD
TRACTOR
FRUIT PICKING/HARVESTING
4WD TRACTOR
WATER PUMP (IRRIGATION)
WOOD CHIPPER
CONCRETE MIXER
CONCRETE SPRAYER
EXCAVATOR

COMPACTION ROLLER
LINE STRIPER
COMPACT SHOVEL LOADER
TELESCOPIC HANDLER
SKID STEER LOADER
BACK HOE LOADER
WHEELED LOADER
SELF-PRIMING WATER PUMP
AIR COMPRESSOR

GENERATOR SET
WELDER
MOTOR SWEEPER
AERIAL PLATFORM
STRINGING EQUIPMENT
HIGH PRESSURE WASHER
FIRE FIGHTING PUMP
FORKLIFT

KDI 2504M

COMBUSTION SYSTEM:	DIRECT INJECTION
COOLING SYSTEM:	LIQUID
INTAKE SYSTEM:	NATURALLY ASPIRATED
WARRANTY:	3 YEARS



MODEL		KDI-M 2504 EA
MAX. POWER	kW (hp) @ rpm	36.4 (49) @ 2600
MAXIMUM TORQUE	Nm (lb-ft) @ rpm	170 (125) @ 1500
EMISSION COMPLIANCE		EU STAGE IIIA EQUIVALENT
NUMBER OF CYLINDERS		4
BORE AND STROKE	mm (in)	88 X 102 (3.5 X 4)
DISPLACEMENT	cm ³ (in ³)	2482 (151.5)
OIL SUMP CAPACITY	L (U.S. qt)	11.3* (11.9)
DIMENSIONS L x W x H	mm (in)	704 X 453 X 668 (27.7 X 17.8 X 26.3)
DRY WEIGHT	kg (lbs)	244 (537.9)

* without dynamic balancers

KDI 1903TCR

KDI-TCQ 1903U3/26
KDI-TCF 1903U4/26
KDI-TCR 1903E5/26
KDI-TC 1903E5/26



INCREASE MACHINE
PRODUCTIVITY
STRONG PERFORMANCE



BEST COMFORT
APPLICATION FLEXIBILITY
LONG SERVICE INTERVALS
COMPACTNESS



FUEL SAVING

Standard Equipment

INTAKE MANIFOLD
EXHAUST MANIFOLD
SIDE OIL REFILLING
ELECTRIC STARTER
80A ALTERNATOR
SAE 4 (7" 1/2)

CABIN HEATING PROVISION
OIL FILTER ENGINE
MOUNTED
FUEL FILTER WITH WATER
SENSOR
ENVIRONMENTALLY
FRIENDLY OIL FILTER

Main Applications

FRUITYARD/VINYARD
TRACTOR
4WD TRACTOR
WATER PUMP (IRRIGATION)
CONCRETE SPRAYER
DUMPER
EXCAVATOR
COMPACTION ROLLER
ASPHALT CUTTER

COMPACT SHOVEL LOADER
SKID STEER LOADER
WHEELED LOADER
SELF-PRIMING WATER PUMP
AIR COMPRESSOR
GENERATOR SET
REFRIGERATING GROUPS
WELDER
MOTOR SWEEPER

AERIAL PLATFORM
STRINGING EQUIPMENT
HIGH PRESSURE WASHER
FORKLIFT

KDI 1903TCR

COMBUSTION SYSTEM:	DIRECT INJECTION
COOLING SYSTEM:	LIQUID
INTAKE SYSTEM:	TURBOCHARGED
WARRANTY:	3 YEARS



MODEL		KDI-TCQ 1903U3/26	KDI-TCF 1903U4/26	KDI-TCR HP 1903E5/26	KDI-TCR 1903E5/26	KDI-TC 1903E5/26
MAX. POWER	kW (hp) @ rpm	42 (56) @ 2600	42 (56) @ 2600	50 (67) @ 2600	42 (56) @ 2600	37 (50) @ 2600
MAXIMUM TORQUE	Nm (lb-ft) @ rpm	225 (166) @ 1500	225 (166) @ 1500	250 @ 1500	225 (166) @ 1500	170 (125) @ 1500
EMISSION COMPLIANCE		EU Stage IIIA US Tier 3 Equivalent	EU Stage IIIB US Tier 4 Final	EU Stage V US Tier 4 Final*	EU Stage V, US Tier 4 Final*, China IV, Bharat TREM V/CEV V	
KDI FLEX		U3	U4 (EGR+DOC)	E5 (EGR+DOC+DPF)		
AFTERCOOLER		•	•	•	•	NO
NUMBER OF CYLINDERS		3				
BORE AND STROKE	mm (in)	88 X 102 (3.5 X 4)				
DISPLACEMENT	cm ³ (in ³)	1861 (113.6)				
OIL SUMP CAPACITY	L (U.S. qt)	8.5 (9)				
DIMENSIONS L x W x H	mm (in)	598 X 530 X 726 (23.5 X 20.9 X 28.6)				
DRY WEIGHT	kg (lbs)	233 (513.7)				

* homologation process for US - Tier 4 Final ongoing

KDI 1903M

KDI-M 1903EA/26



INCREASE MACHINE
PRODUCTIVITY
STRONG PERFORMANCE



BEST COMFORT
APPLICATION FLEXIBILITY
LONG SERVICE INTERVALS
COMPACTNESS



FUEL SAVING

Standard Equipment

INTAKE MANIFOLD
EXHAUST MANIFOLD
SIDE OIL REFILLING
ELECTRIC STARTER
55A ALTERNATOR

SAE 4 (7" 1/2)
CABIN HEATING PROVISION
ENGINE MOUNTED OIL
FILTER
FUEL FILTER

Main Applications

FRUITYARD/VINYARD
TRACTOR
4WD TRACTOR
WATER PUMP (IRRIGATION)
CONCRETE SPRAYER
DUMPER
EXCAVATOR
COMPACTION ROLLER
ASPHALT CUTTER

COMPACT SHOVEL LOADER
SKID STEER LOADER
WHEELED LOADER
SELF-PRIMING WATER PUMP
AIR COMPRESSOR
GENERATOR SET
REFRIGERATING GROUPS
WELDER
MOTOR SWEEPER

AERIAL PLATFORM
STRINGING EQUIPMENT
HIGH PRESSURE WASHER
FIRE FIGHTING PUMP
FORKLIFT

KDI 1903M

COMBUSTION SYSTEM:	DIRECT INJECTION
COOLING SYSTEM:	LIQUID
INTAKE SYSTEM:	NATURALLY ASPIRATED
WARRANTY:	3 YEARS



MODEL		KDI-M 1903EA/26
MAX. POWER	kW (hp) @ rpm	31 (42) @ 2600
MAXIMUM TORQUE	Nm (lb-ft) @ rpm	133 (98) @ 1500
EMISSION COMPLIANCE		EU STAGE IIIA EQUIVALENT
NUMBER OF CYLINDERS		3
BORE AND STROKE	mm (in)	88 X 102 (3.5 X 4)
DISPLACEMENT	cm ³ (in ³)	1861 (113.6)
OIL SUMP CAPACITY	L (U.S. qt)	8.5 (9)
DIMENSIONS L x W x H	mm (in)	598 X 451 X 668 (23.5 X 17.8 X 26.3)
DRY WEIGHT	kg (lbs)	210 (463)

KSD 1403

KSD1403-NA
KSD1403-TC
KSD1403-TCA



ELECTRONIC FUEL
INJECTION INCREASES
MACHINE PRODUCTIVITY
DURABLE COMPONENTS
ALLOW THE END USER TO
USE THE MACHINE FOR
LONGER



VERSATILE ENGINE OPTIONS
ALLOW FOR EASY-TO-
INTEGRATE SOLUTIONS
THAT ARE COMPATIBLE
WITH ALL KINDS OF
MACHINES



COMPLIANCE TO GLOBAL
EMISSIONS NORMS WITH
THE SAME SPECIFICATION
CONTRIBUTE TO LEAN OEM
INVENTORY MANAGEMENT

Standard Equipment

INTAKE MANIFOLD
EXHAUST MANIFOLD
SIDE OIL REFILLING
STARTER MOTOR
45A ALTERNATOR
BACKPLATE FLANGE
DROP-IN FLYWHEEL
ENGINE MOUNTED OIL
FILTRATION SYSTEM

OIL SUMP CAPACITY 3.7 L
FUEL FILTER ENGINE
MOUNTED
ECU
BASIC J1939 ENABLED
WIRING HARNESS

Main Applications

GENERATOR
WELDER
TRACTOR
MOWER
EXCAVATOR
REFRIGERATOR

MINI SKID STEER LOADER
WHEEL LOADER
LIFT
COMPRESSOR
DUMPER
FORKLIFT

KSD 1403

COMBUSTION SYSTEM:	INDIRECT INJECTION
COOLING SYSTEM:	LIQUID
INTAKE SYSTEM:	NATURALLY ASPIRATED/TURBOCHARGED
WARRANTY:	3 YEARS



MODEL		KSD1403-NA	KSD1403-TC	KSD1403-TCA
MAX. POWER	kW (hp) @ rpm	18.9 (25.4) @ 2200-3000 STAGE V	18.9 (25.4) @ 1800-3000 STAGE V	18.9 (25.4) @ 1800-3000 STAGE V
		18.4 (24.7) @ 2200-3000*	18.4 (24.7) @ 1800-3000*	18.4 (24.7) @ 1800-3000*
MAXIMUM TORQUE	Nm (lb-ft) @ rpm	90 (66) @ 1800	105 (77) @ 1500	120 (88) @ 1400
EMISSION COMPLIANCE		EU STAGE V, US TIER 4 FINAL (EPA/CARB) CHINA IV, BHARAT TREM V/CEV V		
NUMBER OF CYLINDERS		3 / COMMON RAIL	3 / TURBO COMMON RAIL	3 / TURBO COMMON RAIL
BORE AND STROKE	mm (in)	81 X 90 (3.2 X 3.5)		
DISPLACEMENT	cm ³ (in ³)	1391 (84.9)		
OIL SUMP CAPACITY	L (U.S. qt)	3.7 (3.9)		
DIMENSIONS L x W x H	mm (in)	482 X 407 X 551 (19 X 16 X 21.7)	482 X 447 X 599 (19 X 17.6 X 23.6)	482 X 447 X 599 (19 X 17.6 X 23.6)
DRY WEIGHT	kg (lbs)	121 (266.8)	127 (280)	126 (277.8)

*Engine model with multiple emission compliance
(Stage V / Tier 4 Final (EPA/CARB) / China IV / Bharat TREM V, CEV V)

KDW 1404

KDW1404 EA36
KDW1404 U436
KDW1404 E536



MODERN DESIGN



COMPACTNESS
LOW WEIGHT



LOW NOISE

Standard Equipment

EXTERNAL SPIN-ON TYPE
OIL FILTER
EXHAUST MANIFOLD
INTAKE MANIFOLD
ACCELERATOR CONTROL
ELECTRIC STARTER MOTOR
AND ALTERNATOR 12V
THERMOSTAT VALVE
FLYWHEEL WITH RING GEAR

FUEL FEEDING MECHANICAL
PUMP
COOLANT PUMP
FLANGING BACKPLATE
ELECTRIC STOP 12V
GLOW PLUG CONTROL UNIT
12V
FUEL FILTER ENGINE
MOUNTED

Main Applications

LAWN MOWER
FRUITYARD/VINYARD
TRACTOR
FRUIT PICKING/HARVESTING
WOOD CHIPPER
CONCRETE MIXER
CONCRETE SPRAYER
VIBRATING PLATE
GENERATOR SET

REFRIGERATING GROUPS
MOTOR SWEEPER
AERIAL PLATFORM
STRINGING EQUIPMENT
HIGH PRESSURE WASHER

KDW 1404

COMBUSTION SYSTEM:	INDIRECT INJECTION
COOLING SYSTEM:	LIQUID
INTAKE SYSTEM:	NATURALLY ASPIRATED
WARRANTY:	3 YEARS



MODEL		KDW1404 EA36	KDW1404 U427	KDW1404 E530
MAX. POWER	kW (hp) @ rpm	24.5 (32.8) @ 3600	17.9 (24) @ 2700	18.8 (25.2) @ 3000
MAXIMUM TORQUE	Nm (lb-ft) @ rpm	78 (58) @ 2000	65 (48) @ 1600	78 (58) @ 2000
EMISSION COMPLIANCE		EU STAGE IIIA	US TIER 4 FINAL	EU STAGE V
NUMBER OF CYLINDERS		4		
BORE AND STROKE	mm (in)	75 X 77.6 (3 X 3.1)		
DISPLACEMENT	cm ³ (in ³)	1372 (83.7)		
FUEL TANK CAPACITY	L (U.S. qt)	OPTIONS AVAILABLE 7, 15, 29 (7.4, 15.9, 30.6)		
OIL SUMP CAPACITY	L (U.S. qt)	3.2 (3.4)		
DIMENSIONS L x W x H	mm (in)	599 X 412 X 519 (23.6 X 16.2 X 20.4)		
DRY WEIGHT	kg (lbs)	98 (216.1)		

KDW 1003

KDW1003 ECE R 24
KDW1003 U436
KDW1003 E536



MODERN DESIGN



COMPACTNESS
LOW WEIGHT



LOW NOISE

Standard Equipment

EXTERNAL SPIN-ON TYPE
OIL FILTER
EXHAUST MANIFOLD
INTAKE MANIFOLD
ACCELERATOR CONTROL
ELECTRIC STARTER MOTOR
AND ALTERNATOR 12V
THERMOSTAT VALVE
FLYWHEEL WITH RING GEAR

FUEL FEEDING MECHANICAL
PUMP
COOLANT PUMP
FLANGING BACKPLATE
ELECTRIC STOP 12V
GLOW PLUG CONTROL UNIT
12V
FUEL FILTER ENGINE
MOUNTED

Main Applications

LAWN MOWER
FRUIT YARD/VINYARD
TRACTOR
FRUIT PICKING/HARVESTING
WOOD CHIPPER
CONCRETE MIXER
CONCRETE SPRAYER
MINIDUMPER
MINI EXCAVATOR

COMPACTION ROLLER
TRENCH ROLLER
VIBRATING PLATE
COMPACT SHOVEL LOADER
GENERATOR SET
REFRIGERATING GROUPS
MOTOR SWEEPER
AERIAL PLATFORM
STRINGING EQUIPMENT

HIGH PRESSURE WASHER
LEISURE VEHICLES (ATV)
UTILITY VEHICLES (UTV)

KDW 1003

COMBUSTION SYSTEM:	INDIRECT INJECTION
COOLING SYSTEM:	LIQUID
INTAKE SYSTEM:	NATURALLY ASPIRATED
WARRANTY:	3 YEARS



MODEL		KDW1003 ECE R 24	KDW1003 U436	KDW1003 E536
MAX. POWER	kW (hp) @ rpm	18.6 (24.9) @ 3600	17.7 (23.7) @ 3600	18.8 (25.2) @ 3600
MAXIMUM TORQUE	Nm (lb-ft) @ rpm	63 (46.1) @ 2000	50 (36.9) @ 2600	63 (46.5) @ 2300
EMISSION COMPLIANCE		ECE R 24	US TIER 4 FINAL	EU STAGE V
NUMBER OF CYLINDERS		3		
BORE AND STROKE	mm (in)	75 X 77.6 (3 X 3.1)		
DISPLACEMENT	cm ³ (in ³)	1028 (62.7)		
FUEL TANK CAPACITY	L (U.S. qt)	OPTIONS AVAILABLE 7, 15, 29 (7.4, 15.9, 30.6)		
OIL SUMP CAPACITY	L (U.S. qt)	2.4 (2.5)		
DIMENSIONS L x W x H	mm (in)	516 X 412 X 519 (20.4 X 16.2 X 20.3)		
DRY WEIGHT	kg (lbs)	85 (187.4)		

KDW 702

KDW702 ECE R 24
KDW702 U436
KDW702 E536



MODERN DESIGN



COMPACTNESS
LOW WEIGHT



LOW NOISE

Standard Equipment

EXTERNAL SPIN-ON TYPE
OIL FILTER
EXHAUST MANIFOLD
INTAKE MANIFOLD
ACCELERATOR CONTROL
ELECTRIC STARTER MOTOR
AND ALTERNATOR 12V
THERMOSTAT VALVE
FLYWHEEL WITH RING GEAR

FUEL FEEDING MECHANICAL
PUMP
COOLANT PUMP
FLANGING BACKPLATE
ELECTRIC STOP 12V
GLOW PLUG CONTROL UNIT
12V
FUEL FILTER ENGINE
MOUNTED

Main Applications

MINI EXCAVATOR
COMPACTION ROLLER
VIBRATING PLATE
GENERATOR SET
MOTOR SWEEPER
AERIAL PLATFORM
MINI-CAR
LEISURE VEHICLES (ATV)

KDW 702

COMBUSTION SYSTEM:	INDIRECT INJECTION
COOLING SYSTEM:	LIQUID
INTAKE SYSTEM:	NATURALLY ASPIRATED
WARRANTY:	3 YEARS



MODEL		KDW702 ECE R 24	KDW702 U436	KDW702 E536
MAX. POWER	kW (hp) @ rpm	11.5 (15.4) @ 3600	11.5 (15.4) @ 3600	11.6 (15.5) @ 3600
MAXIMUM TORQUE	Nm (lb-ft) @ rpm	38 (28) @ 2000	34 (25) @ 2600	35 (26) @ 2600
EMISSION COMPLIANCE		ECE R 24	US TIER 4 FINAL	EU STAGE V
NUMBER OF CYLINDERS		2		
BORE AND STROKE	mm (in)	75 x 77.6 (3 x 3.1)		
DISPLACEMENT	cm ³ (in ³)	686 (41.9)		
FUEL TANK CAPACITY	L (U.S. qt)	OPTIONS AVAILABLE 7, 15, 29 (7.4, 15.9, 30.6)		
OIL SUMP CAPACITY	L (U.S. qt)	1.6 (1.7)		
DIMENSIONS L x W x H	mm (in)	424 x 412 x 519 (16.7 x 16.2 x 20.4)		
DRY WEIGHT	kg (lbs)	66 (145.5)		

KDW 625-2



HIGH POWER DENSITY
HIGH TORQUE



HIGH RELIABILITY



LONG ENGINE LIFE

Standard Equipment

ELECTRIC STARTING WITH
12 V STARTER MOTOR AND
ALTERNATOR
REMOTE THROTTLE
CONTROL
OIL PRESSURE SWITCH
COMBINED MANIFOLD AND
EXHAUST MUFFLER
ENGINE FEET
FUEL LIFT PUMP

FUEL TANK WITH FILTER
COUNTER-CLOCKWISE
ROTATION ON POWER
TAKE-OFF SIDE
AUTOMATIC EXTRA FUEL
DEVICE
USE, MAINTENANCE AND
SPARE PARTS BOOKLET
OIL BATH AIR FILTER
MANUAL CONTROL

ACCELERATOR

Main Applications

FRUITYARD/VINYARD
TRACTORS
WATER PUMP (IRRIGATION)
CONCRETE SPRAYER
MINIDUMPER
VIBRATING PLATE
SELF-PRIMING WATER PUMP
AIR COMPRESSOR
GENERATOR SET

REFRIGERATING GROUPS
MOTOR WELDER
MOTOR SWEEPERS
AERIAL PLATFORM
HIGH PRESSURE WASHER
FIRE FIGHTING PUMP

KD 625-2

COMBUSTION SYSTEM:	DIRECT INJECTION
COOLING SYSTEM:	AIR
INTAKE SYSTEM:	NATURALLY ASPIRATED
WARRANTY:	3 YEARS



MODEL		KD 625-2
MAX. POWER	kW (hp) @ rpm	18.8 (25.5) @ 3000
MAXIMUM TORQUE	Nm (lb-ft) @ rpm	67 (49) @ 2000
EMISSION COMPLIANCE		US TIER 3
NUMBER OF CYLINDERS		2
BORE AND STROKE	mm (in)	95 X 88 (3.7 X 3.5)
DISPLACEMENT	cm ³ (in ³)	1248 (76.2)
FUEL TANK CAPACITY	L (U.S. qt)	OPTIONS AVAILABLE 7, 10, 12 (7.4, 10.6, 12.7)
OIL SUMP CAPACITY	L (U.S. qt)	2.8 (3)
DIMENSIONS L x W x H	mm (in)	633 X 557 X 599 (24.9 X 21.9 X 23.6)
DRY WEIGHT	kg (lbs)	115 (253.5)

KD 425-2

KD-425/2 NE36



HIGH POWER DENSITY
HIGH TORQUE



HIGH RELIABILITY



LONG ENGINE LIFE

Standard Equipment

ELECTRIC STARTING WITH
12 V STARTER MOTOR AND
ALTERNATOR
REMOTE THROTTLE
CONTROL
OIL PRESSURE SWITCH
COMBINED MANIFOLD AND
EXHAUST MUFFLER
ENGINE FEET
FUEL LIFT PUMP

FUEL TANK WITH FILTER
COUNTER-CLOCKWISE
ROTATION ON POWER
TAKE-OFF SIDE
AUTOMATIC EXTRA FUEL
DEVICE
USE, MAINTENANCE AND
SPARE PARTS BOOKLET
OIL BATH AIR FILTER
MANUAL CONTROL

ACCELERATOR

Main Applications

FRUITYARD/VINYARD
TRACTORS
WATER PUMP (IRRIGATION)
CONCRETE SPRAYER
MINIDUMPER
VIBRATING PLATE
SELF-PRIMING WATER PUMP
AIR COMPRESSOR
GENERATOR SET

REFRIGERATING GROUPS
MOTOR WELDER
MOTOR SWEEPERS
AERIAL PLATFORM
HIGH PRESSURE WASHER
FIRE FIGHTING PUMP

KD 425-2

COMBUSTION SYSTEM:	DIRECT INJECTION
COOLING SYSTEM:	AIR
INTAKE SYSTEM:	NATURALLY ASPIRATED
WARRANTY:	3 YEARS



MODEL	KD-425/2 NE36	
MAX. POWER	kW (hp) @ rpm	13 (17.4) @ 3600
MAXIMUM TORQUE	Nm (lb-ft) @ rpm	40 (31) @ 2200
EMISSION COMPLIANCE		ECE R 24
NUMBER OF CYLINDERS		2
BORE AND STROKE	mm (in)	85 x 75 (3.3 x 3)
DISPLACEMENT	cm ³ (in ³)	851 (51.9)
FUEL TANK CAPACITY	L (U.S. qt)	OPTIONS AVAILABLE 4, 6 (4.2, 6.3)
OIL SUMP CAPACITY	L (U.S. qt)	1.7 (1.8)
DIMENSIONS L x W x H	mm (in)	485 x 464 x 503.5 (19.1 x 18.3 x 19.8)
DRY WEIGHT	kg (lbs)	63 (138.9)

KD15 440

KD15-440 NE36
KD15-440 U436
KD15-440 E536



HIGH POWER DENSITY
HIGH RELIABILITY



LOW WEIGHT
A COMPLETE RANGE OF
ACCESSORIES



LOW FUEL CONSUMPTION
LOW OIL CONSUMPTION

Standard Equipment

RECOIL STARTING WITH
AUTOMATIC COMPRESSION
RELEASE
FUEL TANK
FUEL FILTER
DRY AIR CLEANER
MUFFLER WITH GUARD
ACCELERATOR AND STOP
MANUAL CONTROL

AUTOMATIC DEAERATION
ON INJECTION PUMP
WIRE MESH OIL FILTER
CONICAL POWER TAKE-OFF
EXTERNAL SAFETY FUEL
FILTER
AUTOMATIC FUEL CONTROL
DURING START

USER MAINTENANCE AND
SPARE PARTS BOOKLET
HYDRAULIC TAPPETS
HIGH CAPACITY DRY AIR
CLEANER
FUEL TANK DRAIN TAP

Main Applications

WALK-BEHIND TRACTOR
TILLER
LAWN MOWER
WATER PUMP (IRRIGATION)
CONCRETE MIXER
MINIDUMPER
COMPACTION ROLLER
VIBRATING PLATE
ASPHALT CUTTER

LINE STRIPER
SELF-PRIMING WATER PUMP
AIR COMPRESSOR
GENERATOR SET
WELDER
MOTOR SWEEPER
AERIAL PLATFORM
HIGH PRESSURE WASHER
FIRE FIGHTING PUMP

KD15 440

COMBUSTION SYSTEM:	DIRECT INJECTION
COOLING SYSTEM:	AIR
INTAKE SYSTEM:	NATURALLY ASPIRATED
WARRANTY:	3 YEARS



MODEL		KD15-440 NE36	KD15-440 E536	KD15-440 U436*
MAX. POWER	kW (hp) @ rpm	7.5 (10.1) @ 3600	7.5 (10.1) @ 3600	7.5 (10.1) @ 3600
MAXIMUM TORQUE	Nm (lb-ft) @ rpm	23 (17) @ 2200	24.5 (18) @ 2200	24.5 (18) @ 2200
EMISSION COMPLIANCE		ECE R 24	EU STAGE V	US TIER 4 FINAL
NUMBER OF CYLINDERS		1		
BORE AND STROKE	mm (in)	86 x 76 (3.4 x 3)		
DISPLACEMENT	cm ³ (in ³)	441 (26.9)		
FUEL TANK CAPACITY	L (U.S. qt)	4.3 (4.5)		
OIL SUMP CAPACITY	L (U.S. qt)	1.2 (1.3)		
DIMENSIONS L x W x H	mm (in)	413 x 340 x 493 (16.3 x 13.4 x 19.4)		
DRY WEIGHT	kg (lbs)	45 (99.2)		

* Dual speed

KD 15 441

KDW1404 EA36
KDW1404 U436
KDW1404 E536



HIGH POWER DENSITY



LOW NOISE
LOW WEIGHT
LOW REPAIR COST
A COMPLETE RANGE OF
ACCESSORIES



LOW FUEL CONSUMPTION
LOW OIL CONSUMPTION

Standard Equipment

RECOIL STARTING WITH
SEMI-AUTOMATIC
COMPRESSION RELEASE
SEPARATE CYLINDER
BARREL
FUEL TANK

FUEL FILTER
DRY AIR CLEANER
MUFFLER WITH GUARD
ACCELERATOR AND STOP
MANUAL CONTROL

Main Applications

TWO-WHEEL TRACTOR
AGRICULTURAL MOWER
AGRICULTURAL PUMP
HIGH PRESSURE CLEANER
GENERATOR SET
VIBRATING PLATE
HYDRAULIC POWER PACK

KD 15 441

COMBUSTION SYSTEM:	DIRECT INJECTION
COOLING SYSTEM:	AIR
INTAKE SYSTEM:	NATURALLY ASPIRATED
WARRANTY:	3 YEARS



MODEL		KD15 441
MAX. POWER	kW (hp) @ rpm	7.0 (9.4) @ 3600
MAXIMUM TORQUE	Nm (lb-ft) @ rpm	21 (15.5) @ 2200
EMISSION COMPLIANCE		NO REGULATIONS
NUMBER OF CYLINDERS		1
BORE AND STROKE	mm (in)	86 X 76 (3.4 X 3)
DISPLACEMENT	cm ³ (in ³)	441 (26.9)
FUEL TANK CAPACITY	L (U.S. qt)	5 (5.3)
OIL SUMP CAPACITY	L (U.S. qt)	1.5 (1.6)
DIMENSIONS L x W x H	mm (in)	413 X 340 X 493 (16.3 X 13.4 X 19.4)
DRY WEIGHT	kg (lbs)	45 (99.2)

KD15 350

KD15-350 NE36
KD15-350 E536



HIGH POWER DENSITY



LOW WEIGHT
A COMPLETE RANGE
OF ACCESSORIES



LOW FUEL CONSUMPTION
LOW OIL CONSUMPTION

Standard Equipment

RECOIL STARTING WITH
AUTOMATIC COMPRESSION
RELEASE
FUEL TANK
FUEL FILTER
DRY AIR CLEANER
MUFFLER WITH GUARD
ACCELERATOR AND STOP
MANUAL CONTROL

AUTOMATIC DEAERATION
ON INJECTION PUMP
WIRE MESH OIL FILTER
CONICAL POWER TAKE-OFF
EXTERNAL SAFETY FUEL
FILTER
AUTOMATIC FUEL CONTROL
DURING START

Main Applications

WALK-BEHIND TRACTOR
TILLER
LAWN MOWER
WATER PUMP (IRRIGATION)
CONCRETE MIXER
MINIDUMPER
COMPACTION ROLLER
VIBRATING PLATE
ASPHALT CUTTER

LINE STRIPER
SELF-PRIMING WATER PUMP
AIR COMPRESSOR
GENERATOR SET
WELDER
MOTOR SWEEPER
AERIAL PLATFORM
HIGH PRESSURE WASHER
FIRE FIGHTING PUMP

KD15 350

COMBUSTION SYSTEM:	DIRECT INJECTION
COOLING SYSTEM:	AIR
INTAKE SYSTEM:	NATURALLY ASPIRATED
WARRANTY:	3 YEARS



MODEL		KD15-350 NE36	KD15-350 E536
MAX. POWER	kW (hp) @ rpm	5.1 (6.8) @ 3600	5.5 (7.4) @ 3600
MAXIMUM TORQUE	Nm (lb-ft) @ rpm	15.3 (11.3) @ 2400	16 (11.8) @ 2500
EMISSION COMPLIANCE		-	EU STAGE V
NUMBER OF CYLINDERS		1	
BORE AND STROKE	mm (in)	82 x 66 (3.2 x 2.6)	
DISPLACEMENT	cm ³ (in ³)	349 (21.3)	
FUEL TANK CAPACITY	L (U.S. qt)	4.3 (4.5)	
OIL SUMP CAPACITY	L (U.S. qt)	1.2 (1.3)	
DIMENSIONS L x W x H	mm (in)	387 x 301 x 446 (15.2 x 11.9 x 17.5)	
DRY WEIGHT	kg (lbs)	33 (72.8)	

* Single speed

KD15 225



HIGH POWER DENSITY



LOW WEIGHT
A COMPLETE RANGE
OF ACCESSORIES



LOW FUEL CONSUMPTION
LOW OIL CONSUMPTION

Standard Equipment

RECOIL STARTING WITH
AUTOMATIC COMPRESSION
RELEASE
FUEL TANK
FUEL FILTER
DRY AIR CLEANER
MUFFLER WITH GUARD
ACCELERATOR AND STOP
MANUAL CONTROL

AUTOMATIC DEAERATION
ON INJECTION PUMP
WIRE MESH OIL FILTER
CONICAL POWER TAKE-OFF
EXTERNAL SAFETY FUEL
FILTER
AUTOMATIC FUEL CONTROL
DURING START

Main Applications

WALK-BEHIND TRACTOR
TILLER
LAWN MOWER
WATER PUMP (IRRIGATION)
CONCRETE MIXER
MINIDUMPER
COMPACTION ROLLER
VIBRATING PLATE
ASPHALT CUTTER

LINE STRIPER
SELF-PRIMING WATER PUMP
AIR COMPRESSOR
GENERATOR SET
WELDER
MOTOR SWEEPER
AERIAL PLATFORM
HIGH PRESSURE WASHER
FIRE FIGHTING PUMP

KD15 225

COMBUSTION SYSTEM:	DIRECT INJECTION
COOLING SYSTEM:	AIR
INTAKE SYSTEM:	NATURALLY ASPIRATED
WARRANTY:	3 YEARS



MODEL		KD15 225
MAX. POWER	kW (hp) @ rpm	3.3 (4.5) @ 3600
MAXIMUM TORQUE	Nm (lb-ft) @ rpm	10.4 (7.7) @ 2400
EMISSION COMPLIANCE		NO REGULATIONS
NUMBER OF CYLINDERS		1
BORE AND STROKE	mm (in)	69 X 60 (2.7 X 2.4)
DISPLACEMENT	cm ³ (in ³)	224 (13.7)
FUEL TANK CAPACITY	L (U.S. qt)	3 (3.2)
OIL SUMP CAPACITY	L (U.S. qt)	0.9 (1)
DIMENSIONS L x W x H	mm (in)	358 X 265 X 417 (14.1 X 10.4 X 16.4)
DRY WEIGHT	kg (lbs)	28 (61.7)



For more information, contact your Rehko source of supply.
Discovery Energy, LLC reserves the right to make modifications without prior notice.

engines.rehko.com

Printed in Italy

ED0035585320

Rev.13 03/25 Eng

Discovery Energy, LLC